

FIGURE 1


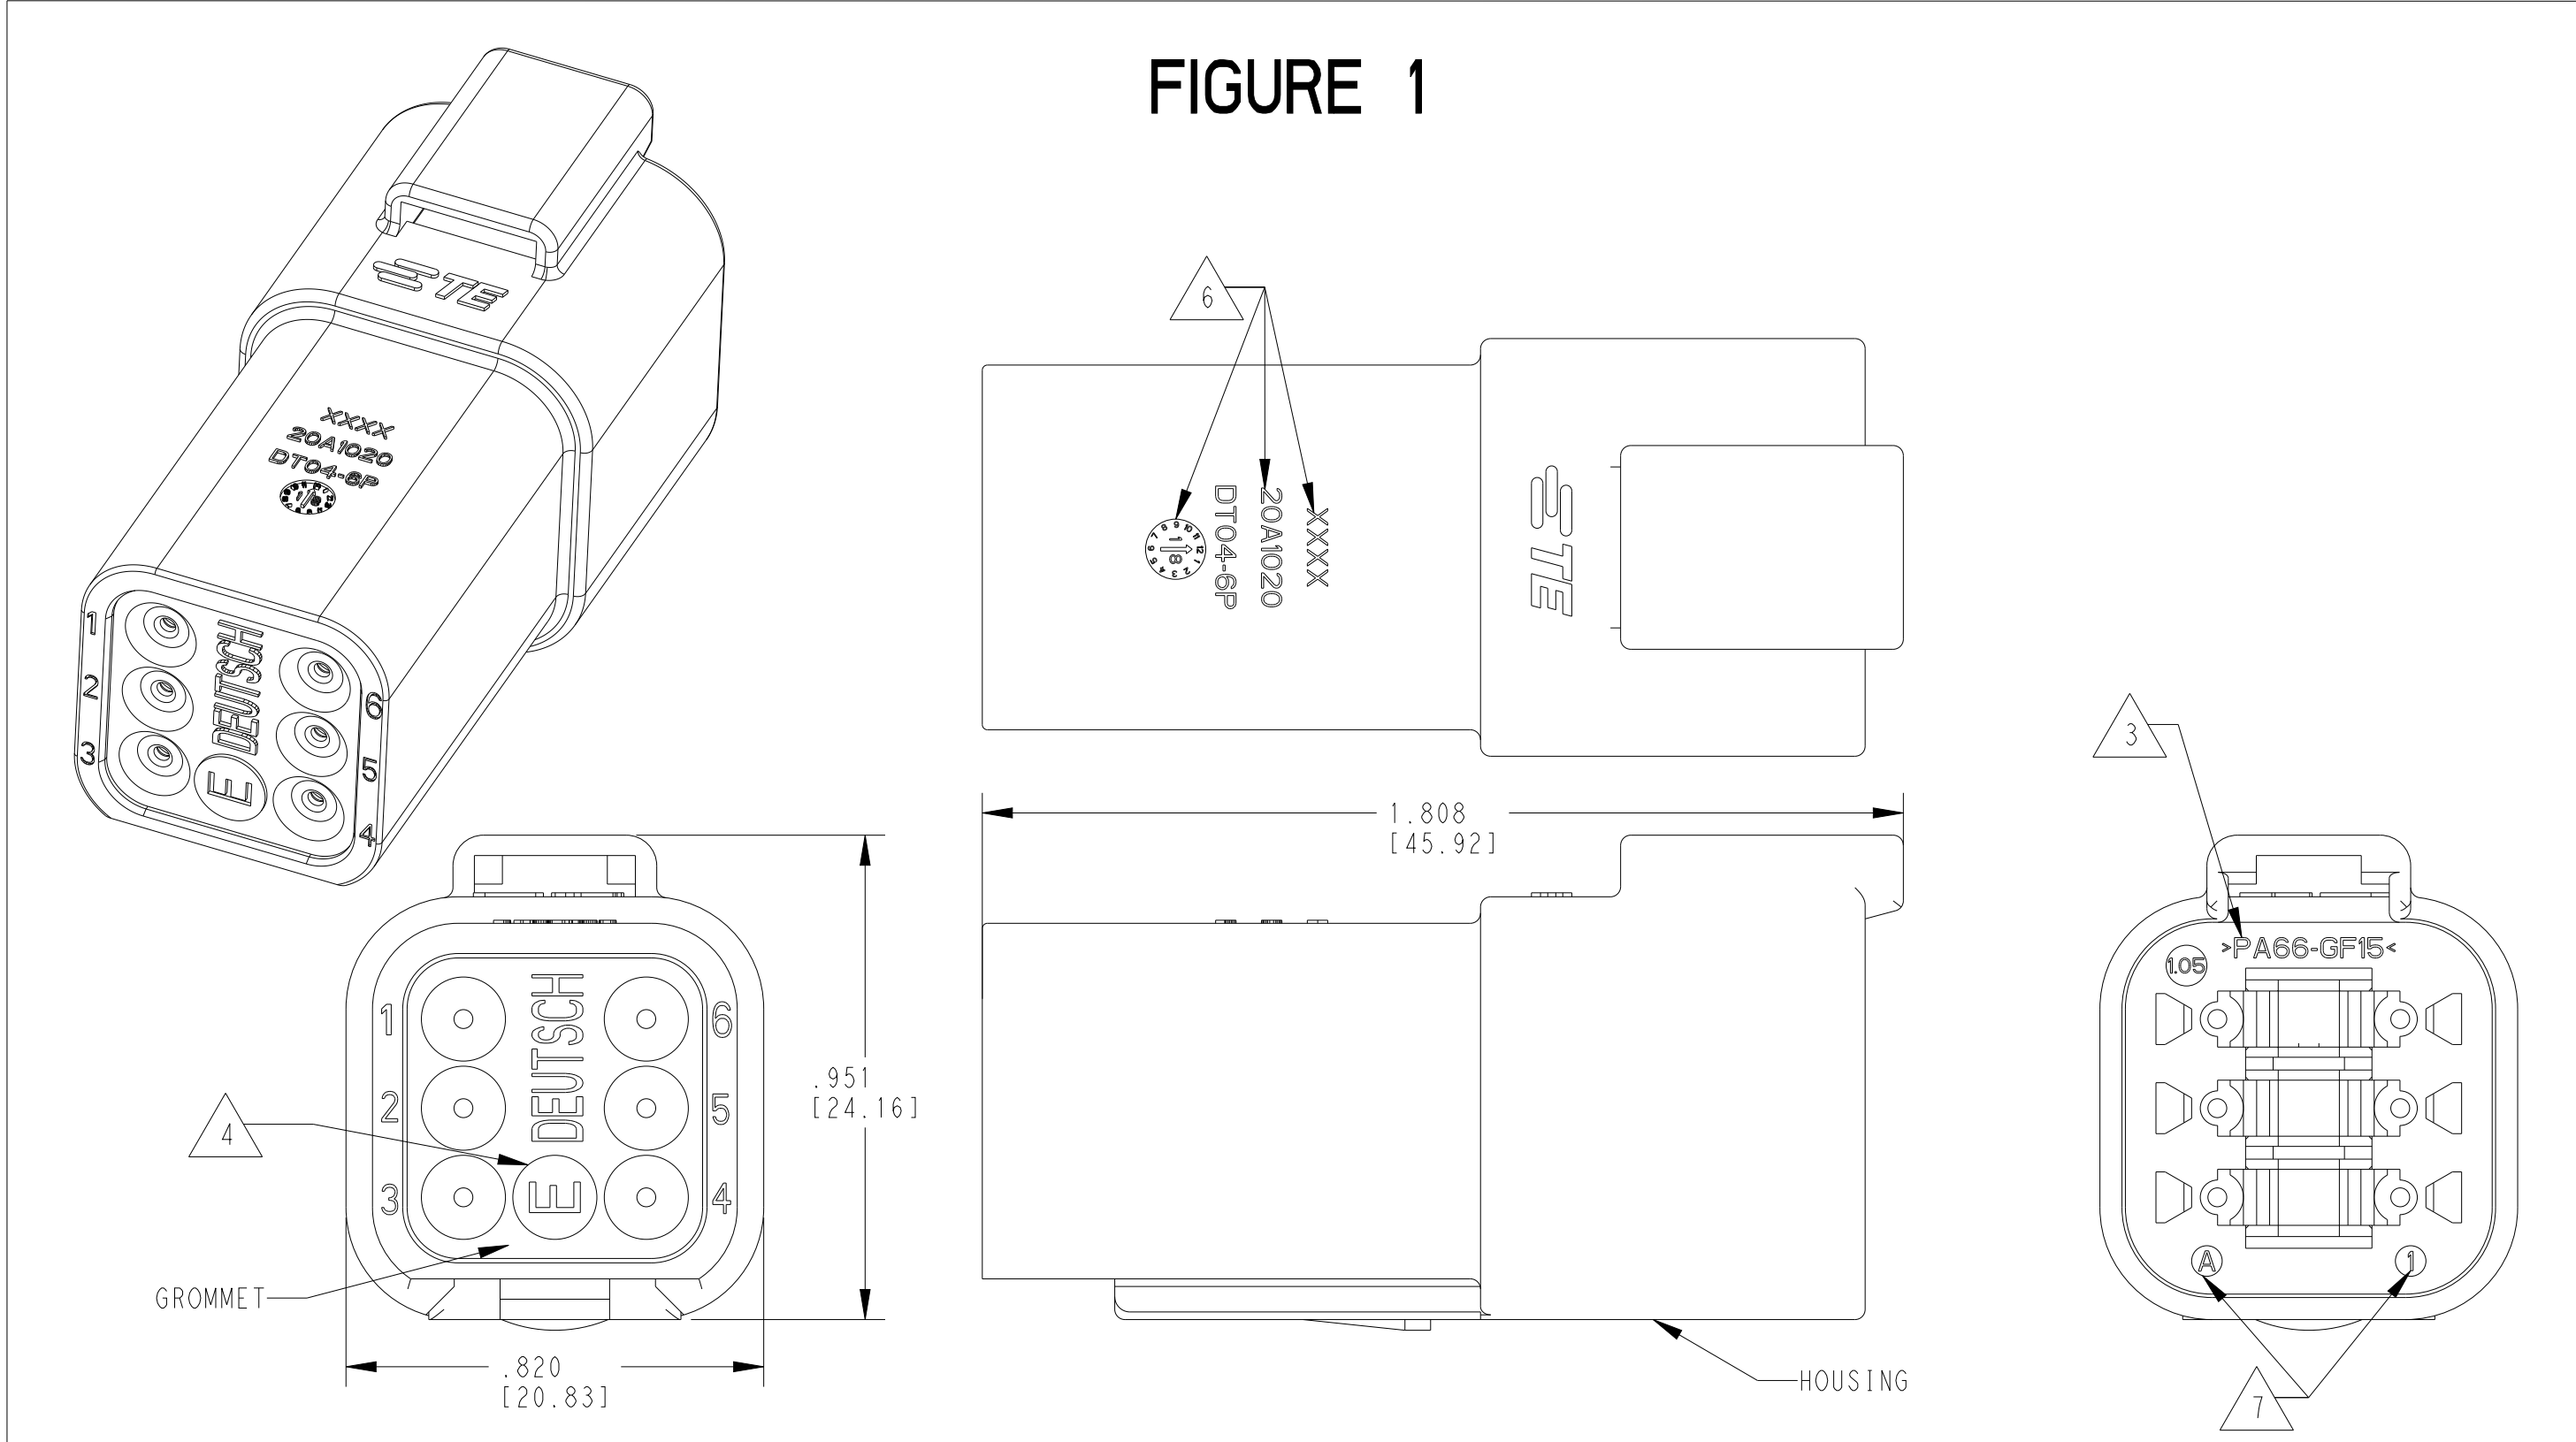


FIGURE 3
LONG CAP

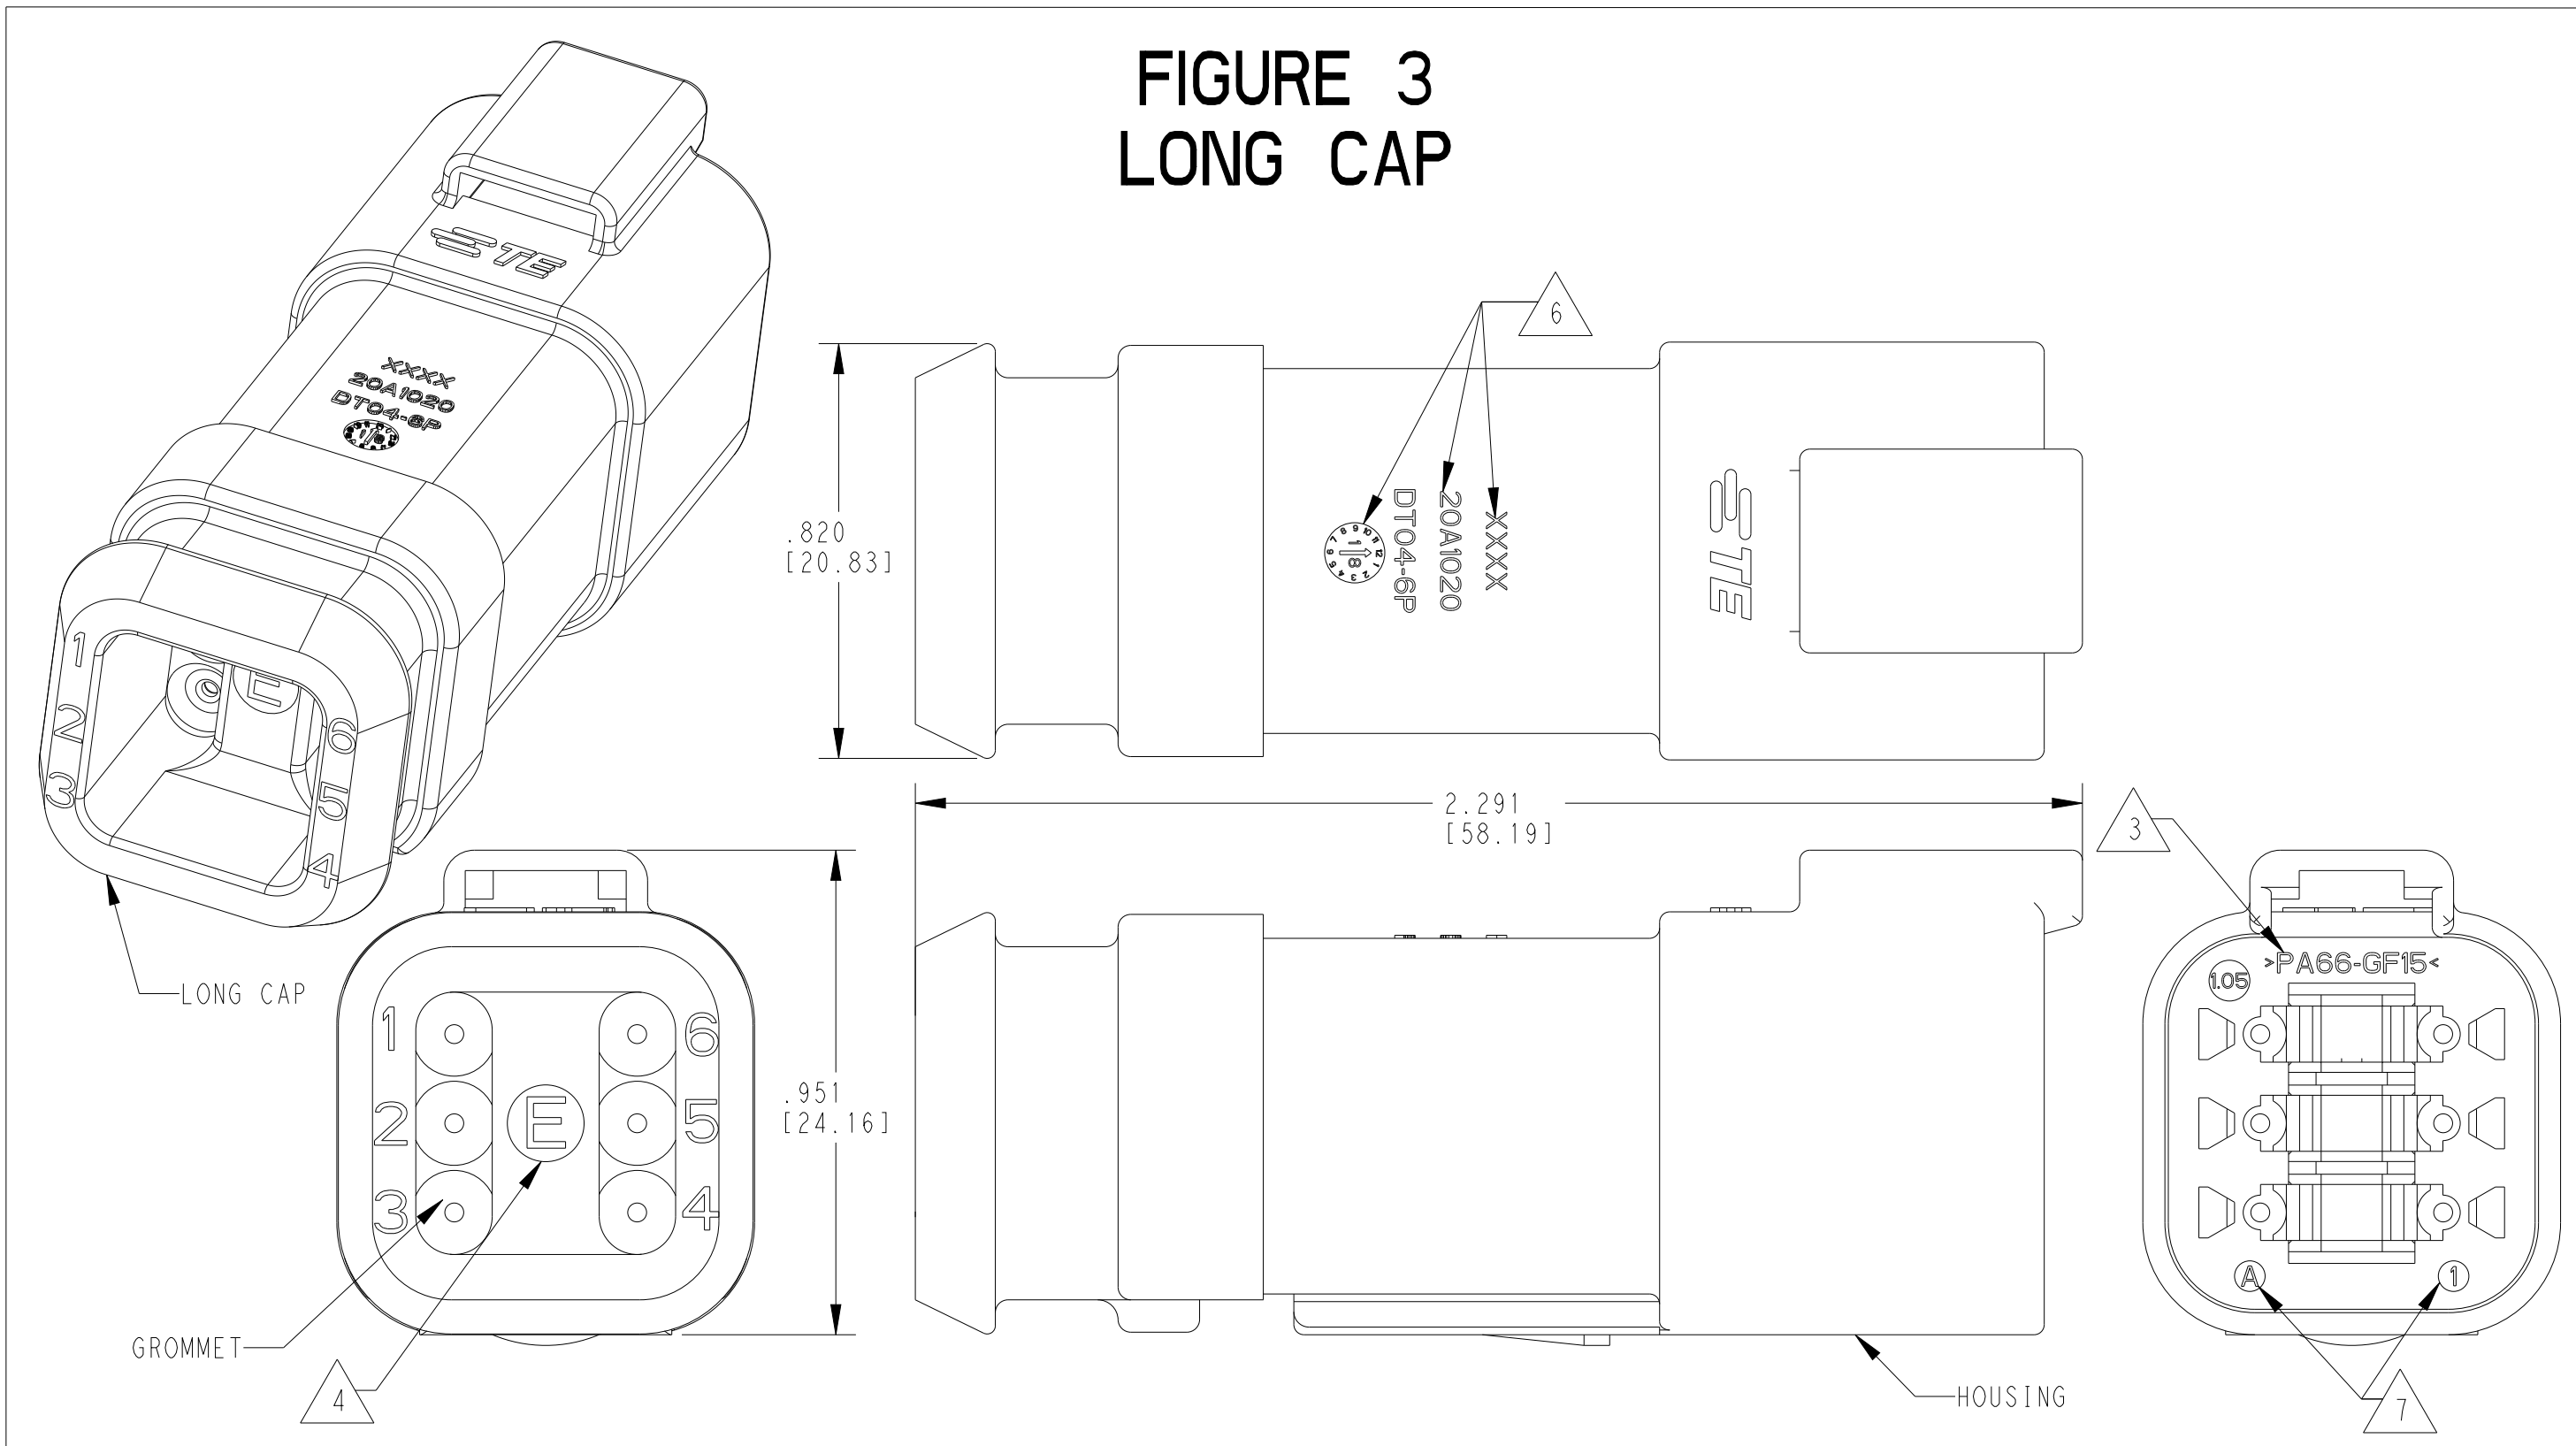

6. MARKING FOR PARTS PRODUCED IN CHINA:

-XXXX IDENTIFIES THE MODIFICATION NUMBER, IF APPLICABLE. EXAMPLE: "E003" FOR DT04-6P-E003, OR BLANK FOR DT04-6P

-DATE CODE: IDENTIFIES THE YEAR, MONTH, DAY AND HOUR OF ASSEMBLY.
YEAR: FIRST AND SECOND DIGIT. (17 = 2017)
MONTH: THIRD DIGIT, EXCLUDING I. A = JAN, B = FEB, C = MARCH ... (K = OCTOBER)
DAY: FOURTH AND FIFTH DIGITS (14 = 14th DAY)
HOUR: SIXTH AND SEVENTH DIGITS (11 = 11AM)




-DIAL DATE CODE LOCATED ON HOUSING AND/OR CAP.
-CN LOCATED ON HOUSING AND/OR CAP.

5. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE CUSTOMER DRAWING 0425-015-0000.


7. MARKING FOR PARTS PRODUCED IN US:

-DATE CODE:
YEAR TO BE LAST NUMERICAL DIGIT, EX: 1 = 2021
MONTH USES SEQUENTIAL ALPHA CHARACTERS, EX: A = JANUARY
-DEUTSCH

FIGURE 2 SHORT CAP

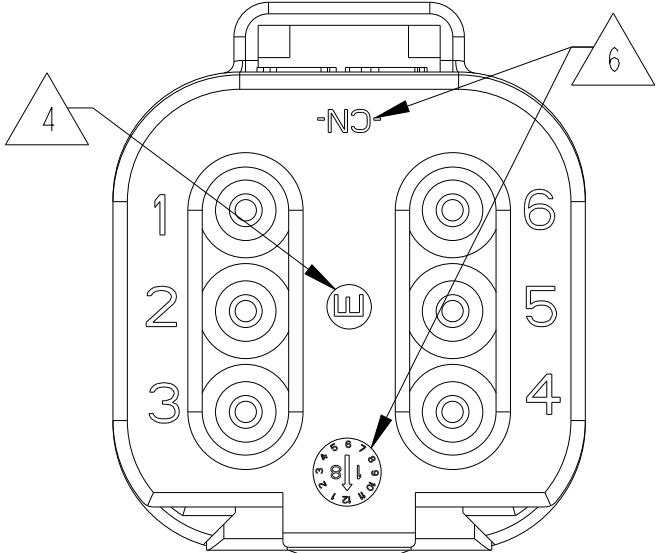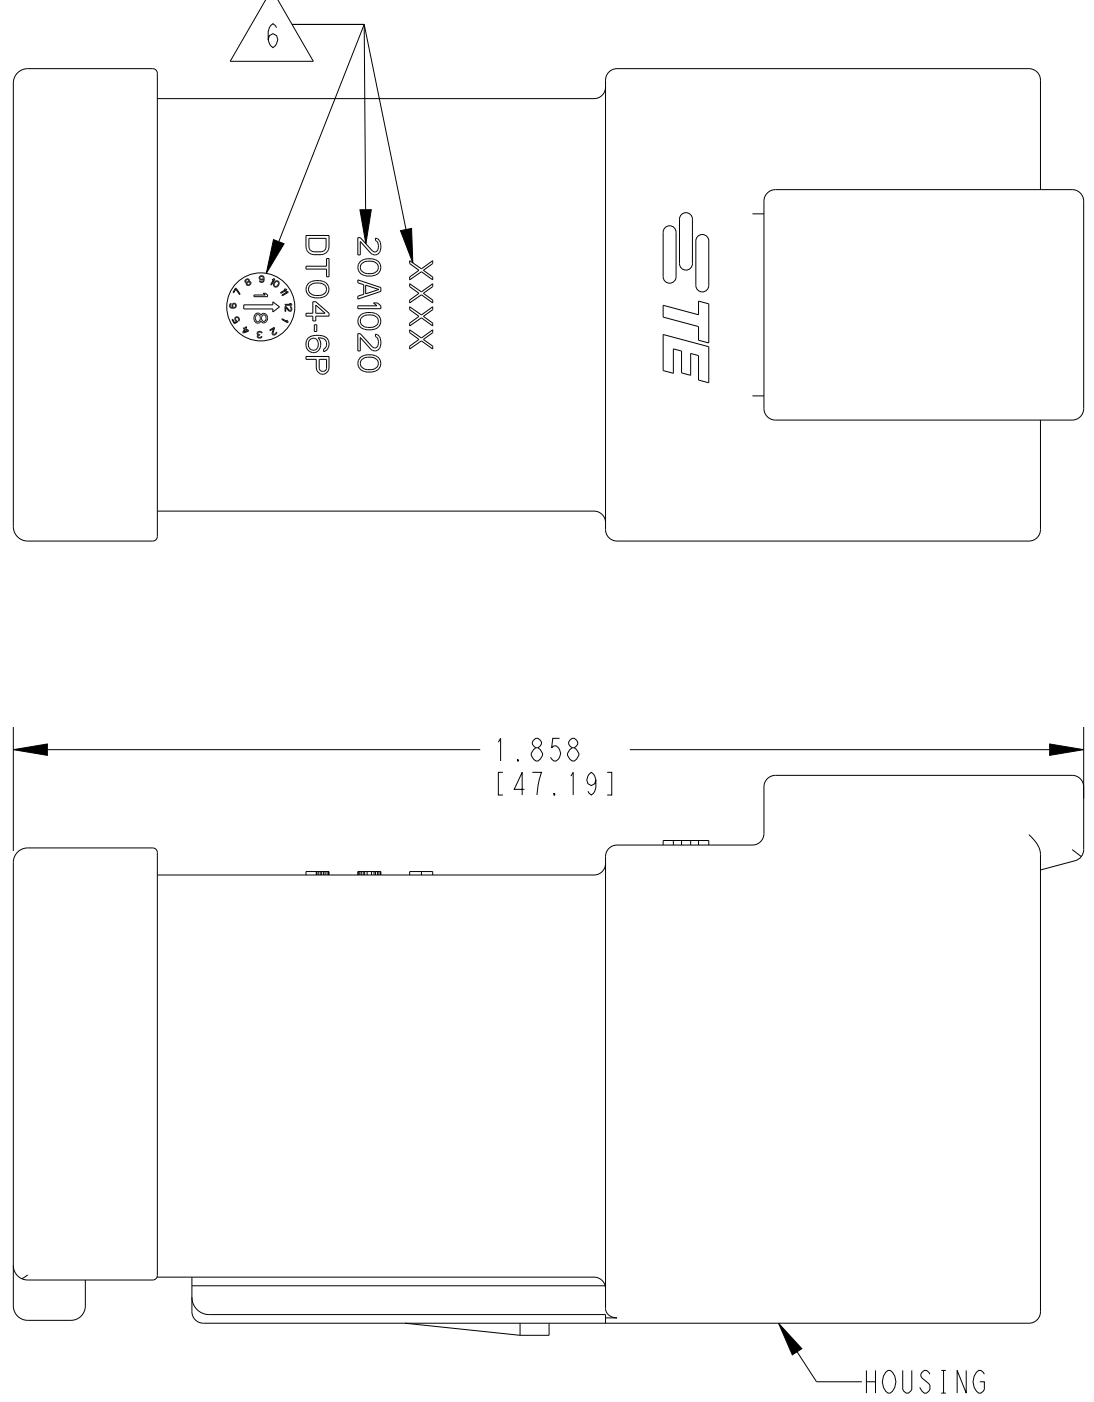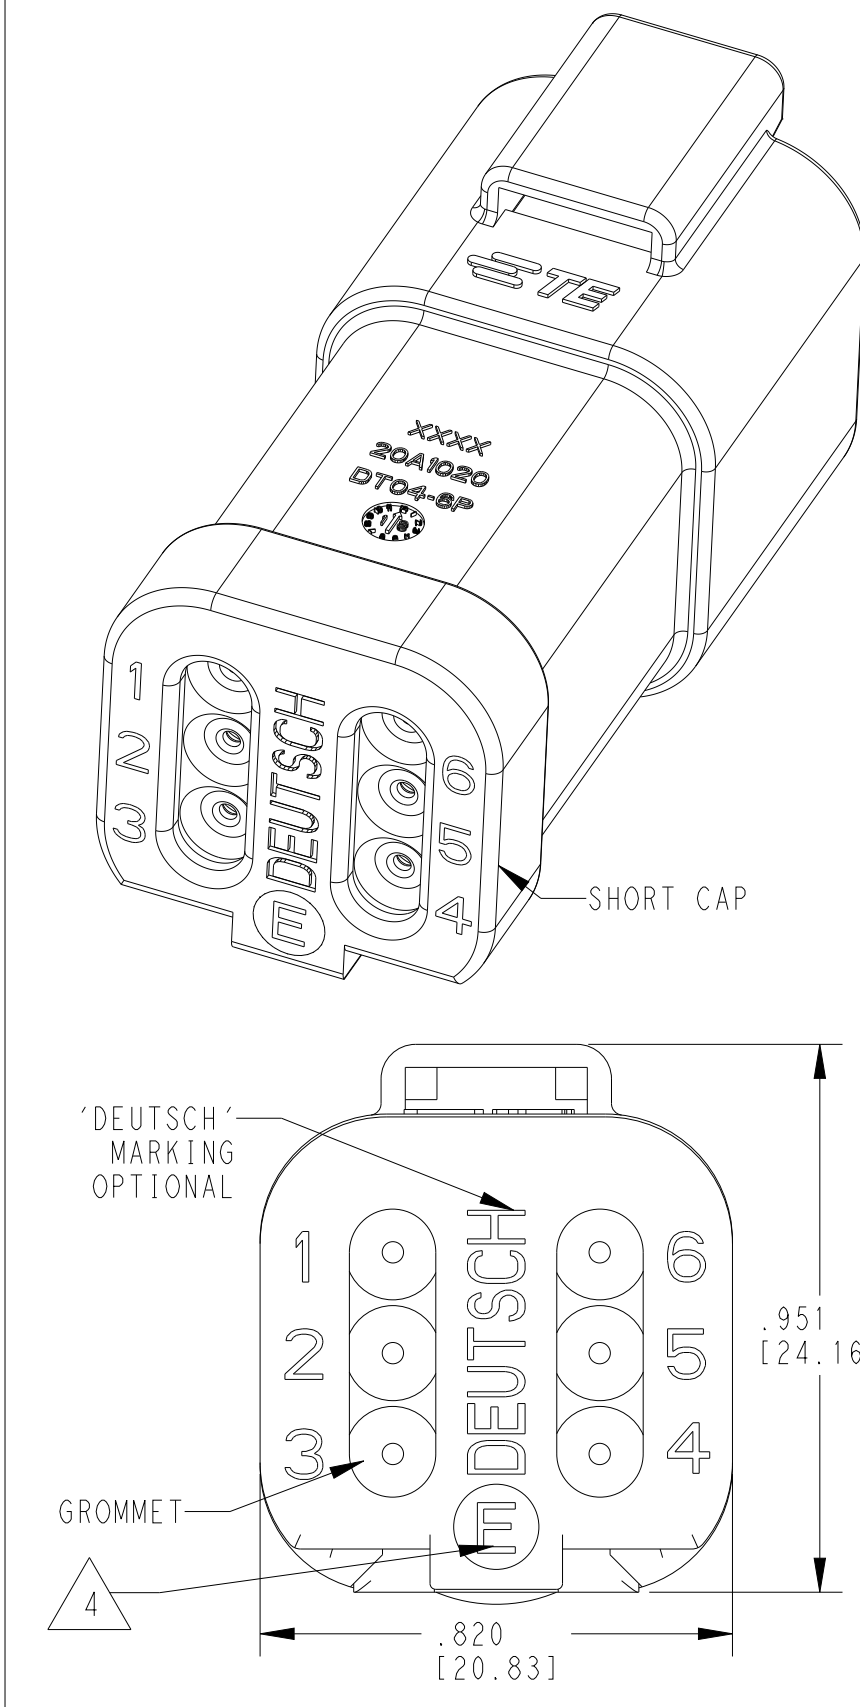


ALT. VIEW FOR
PARTS FROM CHINA

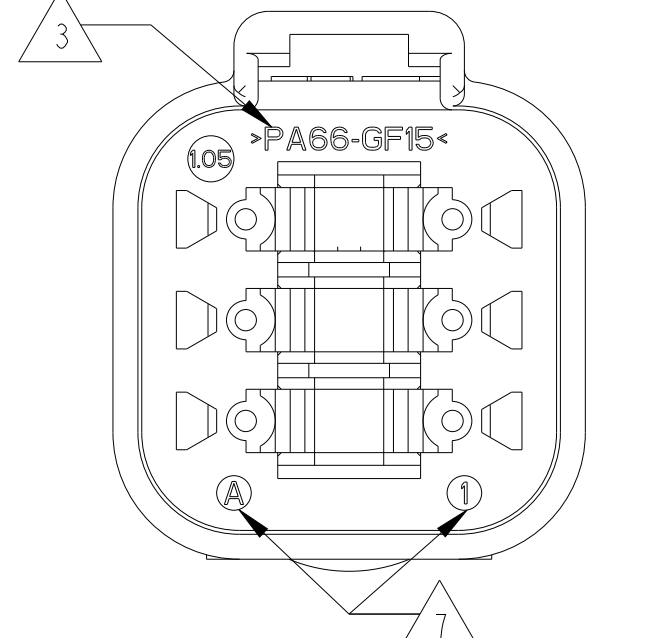


CONTACT SIZE	WIRE RANGE	INSULATION OD SEALING RANGE	SEAL IDENTIFICATION
16	14-20 AWG [2.5-0.5mm ²]	.088-.145 [2.23-3.68] .053-.120 [1.35-3.05]	STANDARD SEAL EXTRA THIN SEAL E-SEAL

TE INTERNAL PART NUMBER	DEUTSCH PART NUMBER	PN REV	HOUSING COLOR	STANDARD SEAL	EXTRA THIN SEAL	BLOCKED SEAL	SHORT CAP	LONG CAP	FIGURE
DT04-6P	DT04-6P	A	GRAY	X					1
DT04-6P-C015	DT04-6P-C015	B	GRAY		X				1
DT04-6P-C017	DT04-6P-C017	B	GRAY			X	X		2
DT04-6P-CE01	DT04-6P-CE01	C	GRAY		X		X		2
DT04-6P-CE02	DT04-6P-CE02	B	BLACK		X				1
DT04-6P-CE03	DT04-6P-CE03	B	BLACK		X		X		2
DT04-6P-CE04	DT04-6P-CE04	B	GRAY		X			X	3
DT04-6P-CE09	DT04-6P-CE09	B	BLACK		X			X	3
DT04-6P-CE26	DT04-6P-CE26	A	BLACK			X	X		2
DT04-6P-E003	DT04-6P-E003	B	GRAY	X			X		2
DT04-6P-E004	DT04-6P-E004	A	BLACK	X					1
DT04-6P-E005	DT04-6P-E005	A	BLACK	X			X		2
DT04-6P-E008	DT04-6P-E008	B	GRAY	X				X	3
DT04-6P-EE01	DT04-6P-EE01	A	BLACK	X				X	3
DT04-6P-EP04	DT04-6P-EP04	C	GRAY	X			X		2
DT04-6P-P004	DT04-6P-P004	B	GRAY	X					1
1-2448114-1	DT04-6P-TE09	A	BROWN		X				1
1-2448114-2	DT04-6P-TE03	A	GREEN		X				1
1-2448114-3	DT04-6P-TE07	A	BLUE		X				1
2-2448114-1	DT04-6P-TN09	A	BROWN	X					1
2-2448114-2	DT04-6P-TN03	A	GREEN	X					1
2-2448114-3	DT04-6P-TN07	A	BLUE	X					1
3-2448114-1	DT04-6P-EE18	A	BROWN		X		X		2
3-2448114-2	DT04-6P-EE16	A	GREEN		X		X		2
3-2448114-3	DT04-6P-EE17	A	BLUE		X		X		2
4-2448114-1	DT04-6P-EE14	A	BROWN	X			X		2
4-2448114-2	DT04-6P-EE13	A	GREEN	X			X		2
4-2448114-3	DT04-6P-EE06	A	BLUE	X			X		2





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. POLO CHK R. MESSENGER APVD J. GRANTCHAROVA 15DEC2021 15DEC2021 PRODUCT SPEC 108-151009 APPLICATION SPEC 114-151009 WEIGHT		NAME 6 WAY RECEPTACLE, STANDARD SEAL EXTRA THIN SEAL, SHORT AND LONG CAP, DT SERIES SIZE 4AFU8 CAGE CODE DRAWING NO 114-151009 RESTRICTED TO -	
DIMENSIONS: IN [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLOC ± 2 PLOC ± 3 PLOC ± 0.25 [0.64] 4 PLOC ± ANGLES FINISH ±0° 30' 0"		TE Connectivity	
		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 1 REV B2	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
-	-		C1	REVISED PER ECO-14-005288	4-9-14	DM
			G	REVISED PER PCN-23-190134	29SEP2023	GB
			G1	REVISED PER PCN-25-261461	05NOV2025	AJ
			G2	REVISED PER PCN-26-276654	14APR2026	CO


OPTIONAL GATE VESTIGE
APPROX. AS SHOWN

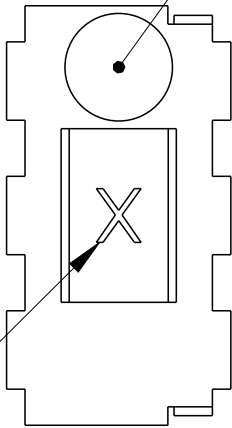

CAVITY I.D. APPROX.
AS SHOWN.

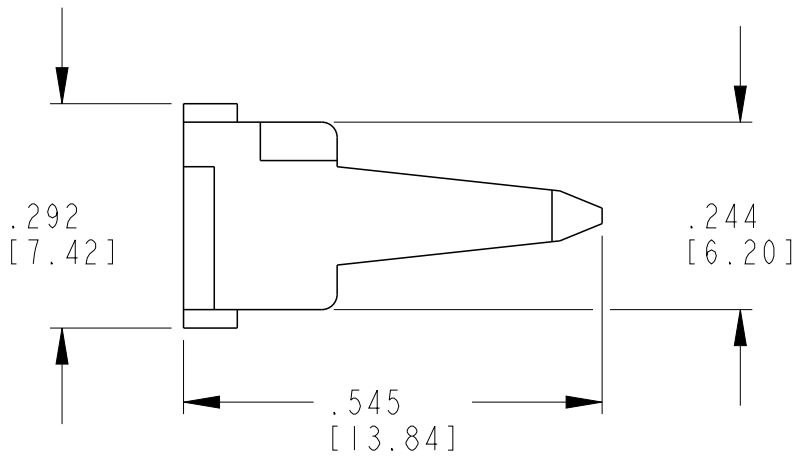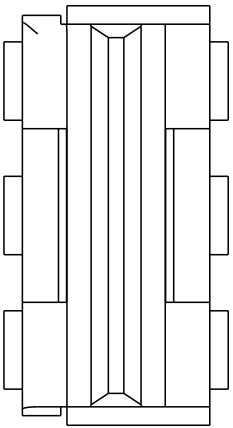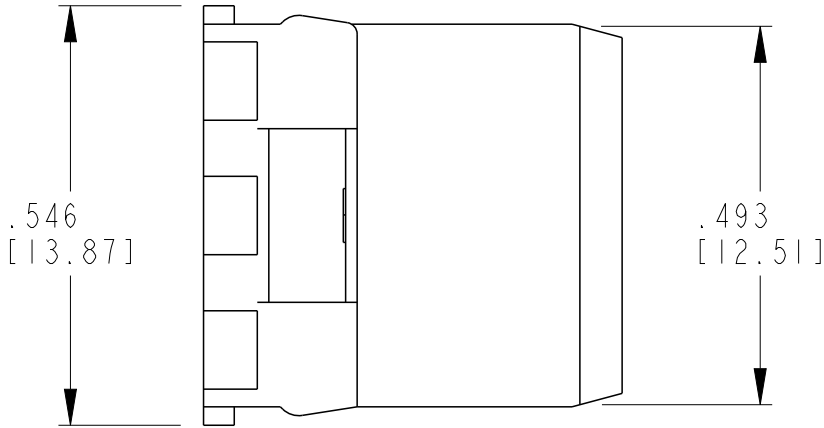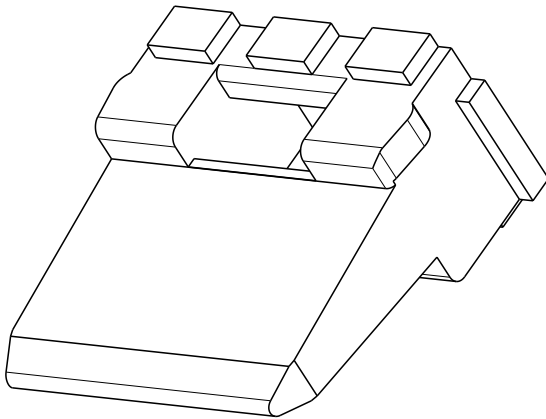

1. USED WITH DT04-6P-XXXX (XXXX = ALL MODIFICATIONS).
CONSULT FACTORY FOR MODIFICATIONS AND APPLICATION.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. MESSENGER 16AUG2013	 TE Connectivity			
DIMENSIONS: INCHES[mm]		CHK R. MESSENGER 28MAR2014				
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MEYER 28MAR2014	NAME WEDGELOCK 6 WAY RECEPTACLE DT SERIES		
	0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±0.025 [0.64] 4 PLC ± ANGLES ±0°30'0"		PRODUCT SPEC 108-151009			
	MATERIAL PBT GF30 GREEN		APPLICATION SPEC 114-151009			
FINISH -		WEIGHT 0.84 g	SIZE A3	CAGE CODE 4AFU8	DRAWING NO C-W6P	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 3:1	SHEET 1 OF 1	REV G2