



1	2	3	4

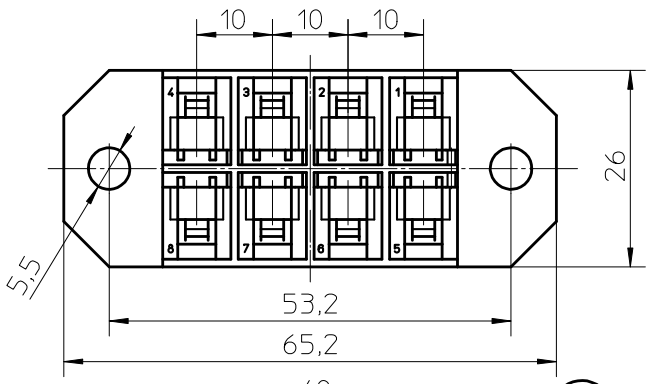

OPERATING FEATURES		
FEATURE	UNIT	VALUE
V max	V	32
T. min - T. max	°C	-30 / +85
* I Global Continuous	A	80
IP	IEC 529	22

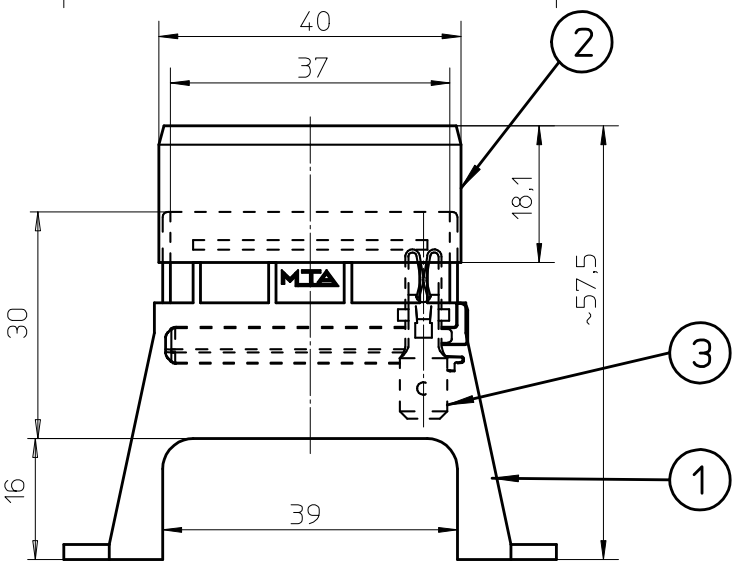

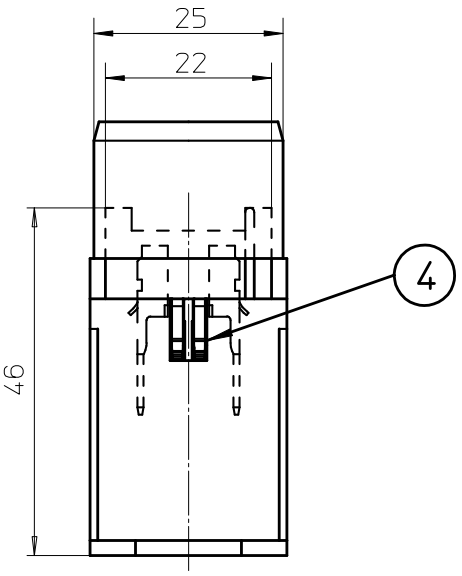

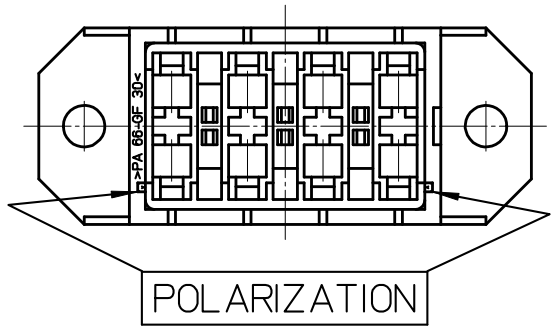

POLARIZATION

*APPLICATION WITH GLOBAL CURRENT HIGHER THAN THE INDICATED ONE, HAVE TO BE VERIFIED AND AUDITED ONE BY ONE

Pos.	Q.ty	DENOMINATION	MATERIAL
4	2	SECONDARY LOCK	PA 66 V2 - YELLOW COLOR
3	8	MALE TERMINAL	CuSn Tin Plated
2	1	COVER	PC V2 - TRANSPARENT
1	1	BODY	PA 66-GF30 HB - BLACK COLOR

MTA	MTA P/N	0100540/20	Denom. FUSE BOX UNIVAL AXIAL 4WAY
	Draw No.	B0-002.012A	Used for
Rel. Level	APPROVED	Draw for	CLIENT
			Relevant Standard

	Date	Name
Draft.	28/12/1995	L. BASSI
Chk	28/12/1995	L. BASSI
PQApp	30/07/2008	R.GONZALEZ
App.	30/07/2008	M.CORBANI

Scale	Weight(g)	Lin.Tol.±	Ang.Tol.±
1:1		0.3	

A4 | Dimensions in (mm) | Sheet 1/1

Material SEE TABLE

Coating SEE TABLE

Color SEE TABLE

No.	Reason for Revision	Date	Name
7	LATERAL HOLES REMOVED	30/07/2008	S.BEDUSCHI

All proprietary rights reserved by MTA S.p.A. - This drawing shall not be reproduced, or in any way utilized, for the manufacture of the component or unit herein illustrated and must not be released to other parties, without written consent. Any infringment will be legally pursued.