



## The WAG corrugated tube

WAG **corrugated tube** have PE, PA, PP extrusion molding, three kinds of material used to protect cable, wire cut, split, mechanical damage, good product flexibility, bending resistance and friction, acid resistance and other properties, good protective for wire, cable, wire,


Can be customized flame retardant, open type wave tube.

### Product application:

Corrugated pipe is suitable for the machinery and equipment, automation equipment, automation control, bus, train, electrical switchgear, etc.



### Product size chart:

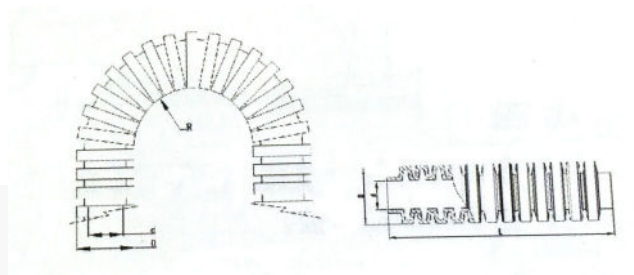

**Technical parameters:**

Material quality: PE, PA, PP

Working temperature: PE: - 40 °C, + 90 °C

PA: - 40 °C, + 130 °C

PP: - 30 °C - + 120 °C

**Standard color:**

black, other color can be customized

Certification: ROHS

Cutting tools, scissors

Other features: high wear resistance, acid resistance, resistance to solvents and gasoline

**Product specifications:**

<b>PE material</b>	<b>PA material</b>	<b>PP material</b>	<b>ID * OD (d*D) (MM)</b>	<b>(R±10%)</b>	<b>PACKING</b>
WAG-PE-7	WAG-PA-7	WAG-PP-7	4.5*7.0	5.0	200m/roll
WAG-PE-8.5	WAG-PA-8.5	WAG-PP-8.5	5.5*8.5	8.0	100m/roll
WAG-PE-10	WAG-PA-10	WAG-PP-10	7.0*10.0	10.0	100m/roll
WAG-PE-12	WAG-PA-12	WAG-PP-12	9.0 * 12.0	15.0	100m/roll
WAG-PE-13	WAG-PA-13	WAG-PP-13	10.0*13.0	20.0	100m/roll
WAG-PE-15.8	WAG-PA-15.8	WAG-PP-15.8	12.0*15.8	30.0	100m/roll
WAG-PE-18.5	WAG-PA-18.5	WAG-PP-18.5	14.3*18.5	40.0	100m/roll
WAG-PE-21.2	WAG-PA-21.2	WAG-PP-21.2	17.0*21.2	45.0	100m/roll

WAG-PE-25	WAG-PA-25	WAG-PP-25	21.0*25.0	50.0	100m/roll
WAG-PE-28.5	WAG-PA-28.5	WAG-PP-28.5	23.0*28.5	55.0	50m/roll
WAG-PE-34.5	WAG-PA-34.5	WAG-PP-34.5	29.0*34.5	60.0	50m/roll
WAG-PE-42.5	WAG-PA-42.5	WAG-PP-42.5	36.0*42.5	70.0	25 m/roll
WAG-PE-54.5	WAG-PA-54.5	WAG-PP-54.5	48.0*54.5	80.0	25 m/roll

### Split corrugated tube

