




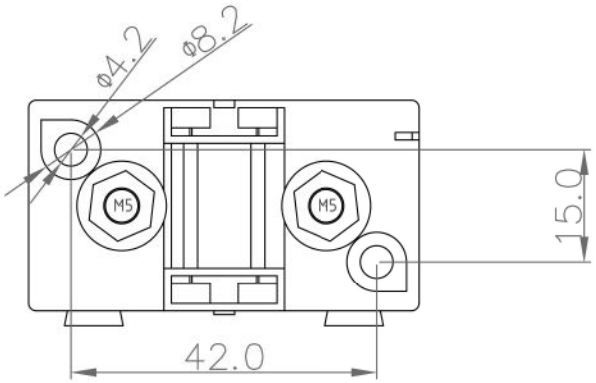






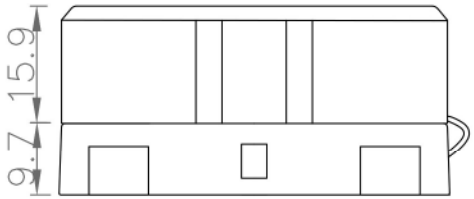

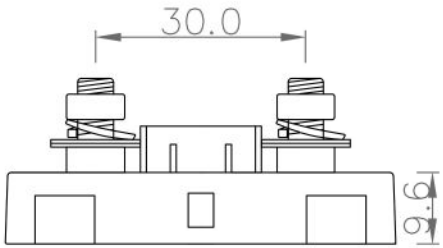


SPECIFICATIONS:

ANS FUSEHOLDER
Model:BH-ANS-H
FUSE:ANS/498/SBFW-L
Electrical: Max.200A 58VDC
Insulating Boby: PA66 /PC/ M304
Insulation Resistance at 58VDC:Min.100MΩ
Operating Temperature: -40 to 125℃
Ignition Protection: UL94-V2
Mounting Method: Bolt-Down/M5

| | | | |
|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm TOLERANCE DECIMALS X±1 0.X±0.5 0.XX±0.05 ANGULAR ±2° DO NOT SCALE DRAWING | | CUSTOMER NO. | Dongguan YTIM Electronic Technology Co., Ltd. |
| | | DRAWN BY TIM.YU | |
| | | CHECKED BY | TITLE FUSE HOLDER |
| | | APPROVED BY sophie | |
| P/N | | DATE 2022-01-05 | PART NO. BH-ANS-H |
| REV | A | SCALE | DRAWING NO. YTIMLINKS |