


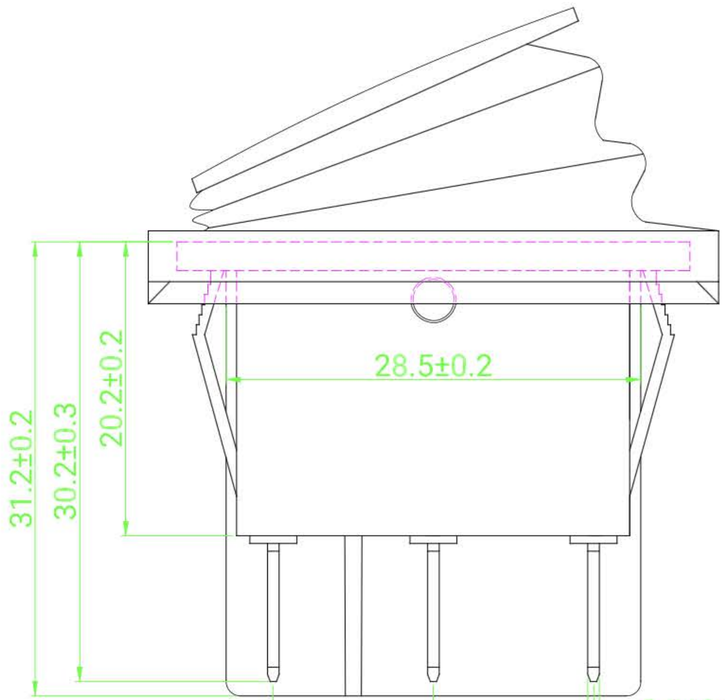


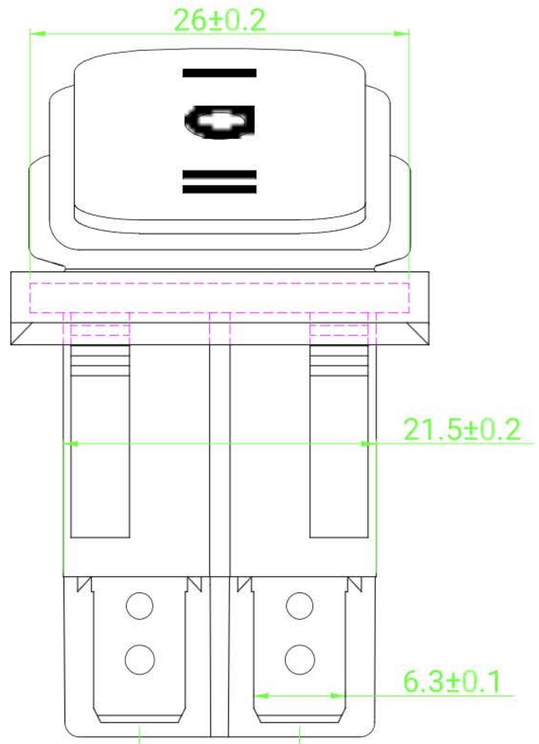

The Main Technology Performance

	Item	Parameter
1.	Rated voltage/current	16A 250VAC 20A 125VAC
2.	Insulated resistance	≥100MΩ
3.	Contact resistance	≤100mΩ
4.	Dielectric strength	≥1500Vac/5mA/5s
5.	Endurance	≥10000 Cycles
6.	Ambient temperature	0-85℃
7.	Operating force	600±300g.f

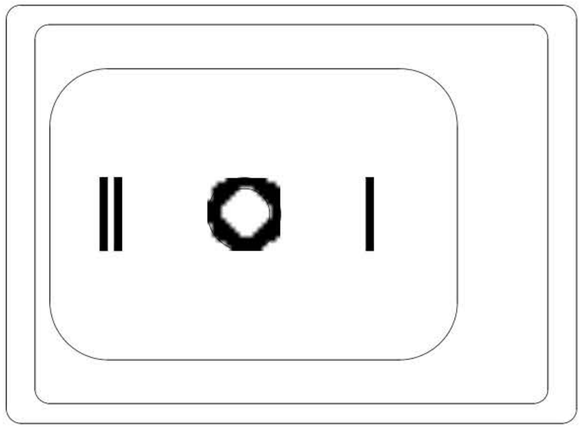

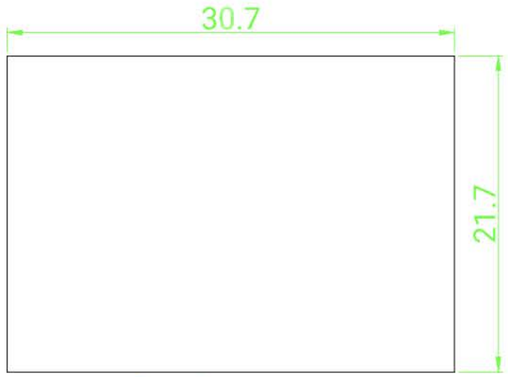


Panel cutout

Normal thickness 1.5～3mm

Parameter

ON-OFF-ON



MARK	AMOUNT	MODIFY FILE NO.	CHANGE BY	DATE

DESIGN	俊华	SCALE	NONE	GENERAL TOLERANCE	
				>0.5~6	±0.10
CHECK	林建旭	UNIT	mm	>6~30	±0.20
				>30~120	±0.30
APPROVAL	林建旭	VERSION	A0	ANGLE	±2°

YUEQING ZUANHUA ELECTRONICS CO., LTD

ROCKER SWITCH

DESIGNATION: KCD4