D-Sub Solder Female Stamp Pin

RoHS Compliant


5501-09SA-02-F1


5501-15SA-02-F1


5501-25SA-02-F1

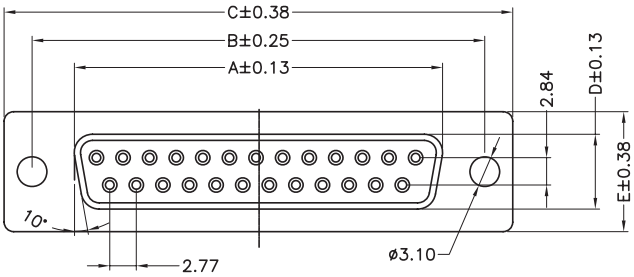

5501-37SA-02-F1

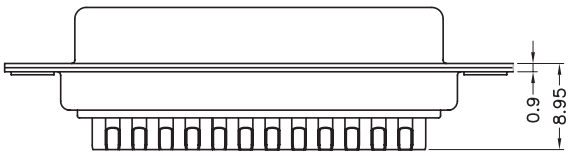

5501-50SA-02-F1

Specifications:

Current Rating	: 3A AC,DC
Voltage Rating	: 250V AC, DC
Contact Resistance	: 30mΩ Max.
Insulation Resistance	: 5,000MΩ Min.
Withstanding Voltage	: 1,000V AC/Minute
Operating Temperature	: -40°C to +85°C
Materials:	
Insulator	: PBT (UL94V-0)
Contact	: Copper alloy Nickel Under coated, Selective Gold Plated
Front Metal Shell	: Nickel Plated
Rear Metal Shell	: Tin Plated
Lead Free	

Dimensions:

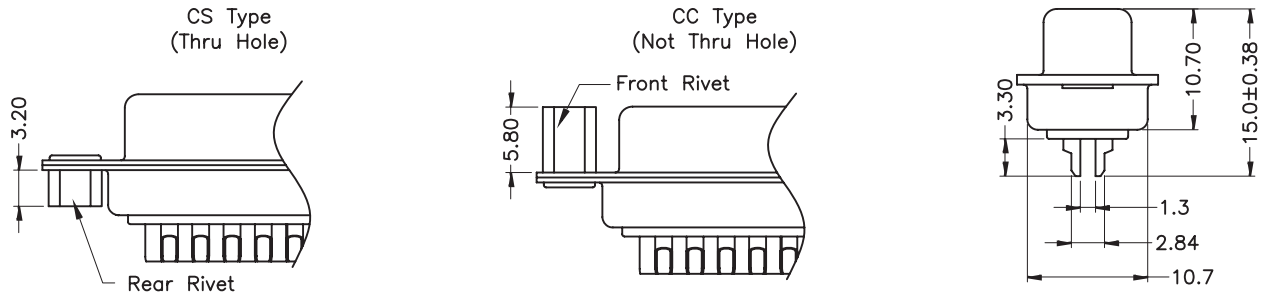




Dimensions : Millimetres

A	B	C	D	E	Positions	Part Number
16.33mm	24.99mm	30.81mm	7.9mm	12.5mm	09	5501-09SA-02-F1
24.66mm	33.32mm	39.14mm	7.9mm	12.5mm	15	5501-15SA-02-F1
38.38mm	47.04mm	53.04mm	7.9mm	12.5mm	25	5501-25SA-02-F1
54.84mm	63.5mm	69.32mm	7.9mm	12.5mm	37	5501-37SA-02-F1
52.43mm	61.11	66.93mm	10.74mm	15.37mm	50	5501-50SA-02-F1

D-Sub Solder Female Stamp Pin



Dimensions : Millimetres

Part Number Table

Description	Part Number
D-Sub Solder Female Stamp 09 Pins	5501-09SA-02-F1
D-Sub Solder Female Stamp 15 Pins	5501-15SA-02-F1
D-Sub Solder Female Stamp 25 Pins	5501-25SA-02-F1
D-Sub Solder Female Stamp 37 Pins	5501-37SA-02-F1
D-Sub Solder Female Stamp 50 Pins	5501-50SA-02-F1

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.